

TC Domino High Power - Procedure of configuration



to use when [E4] is indicated

- I **Caution** → before starting, all pots have to be removed from the cooktop.
- II **Disconnect** the cooktop from the main supply → remove fuse or disconnect circuit breaker.
- III **Connect** the cooktop on the main supply → replace the fuse or connect the circuit breaker.
- IV **Procedure:** Provide yourself with a ferromagnetic bottom container > 16 cm.

* start within **2 minutes**
after connection on the main supply

* don't press [O/I] key

V At first, cancel the existing configuration

How to cancel the existing configuration ?



- 1) Press on the lock key and keep your finger on it.




- 2) With a finger of the other hand press successively and quickly (within **2s**) the keys from the left to the right (a -> b -> c).
A "bip-bip" indicates an handling error → in this case, you have to start the operation from point n°1 again.
- 3) The left display shows alternatively a [C] and a [0]



- 4) Press the key lock until both displays indicate either [C] or [-]
- 5) Take your fingers away from the keys and press again one of the [-] keys during a few seconds until some [E] appear.
- 6) You will hear a "**Beep**" and the [E] will blink.
- 7) The [E] are automatically transformed into [C] → The configuration has been canceled.

VI How to configure the hob again ?

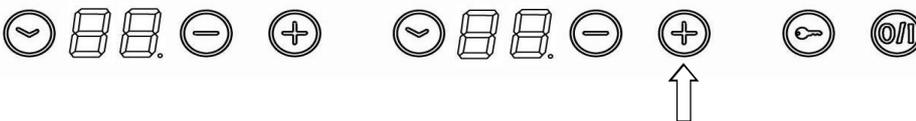

Start for example with the rear heating zone

- 1) Use a ferromagnetic pot with diameter size > 16cm.
- 2) Select the heating zone by pressing on the corresponding [+] key.
- 3) Put the pot on the heating zone to be configured.
- 4) Wait until [C] is transformed in [-] = the zone is configured.
- 5) Proceed all the same for each zone indicating [C] on the display.
- 6) The cooking zones are configured when all of them have been detected and when nothing else is displayed.

**Use only one pot to configure the hob.
Never put several pots on the heating zones during the configuration.**

In order to configurate again an already configured zone, you have to cancel this configuration.